

Air spring press

for the assembly of air bellows


- › Compatible with the following brands: ContiTech, PHOENIX and PRIME-RIDE
- › For folding air springs and pressing bellows onto pistons
- › Time-saving thanks to fast and simple assembly
- › Compact design, ergonomic handling
- › Avoids damage to air springs
- › Ensures work safety in the workshop

Order options

ASP 1 with barrel pump	incl. 2x8 sealing discs*
ASP 2 with barrel pump	incl. 2x2 sealing discs**
ASP 3 with hand pump	incl. 2x8 sealing discs*
ASP 4 with hand pump	incl. 2x2 sealing discs**

Technical data

Design height	1500 mm
Width	450 mm
Depth	500 mm
Weight excl. pump	66 kg
Safety valve opening pressure	5 bar


	* Sealing discs:	SD-102	Ø 102 - 96 mm
		SD-123	Ø 123 - 117 mm
		SD-132	Ø 132 - 126 mm
		SD-153	Ø 153 - 147 mm
		SD-168	Ø 168 - 162 mm
		SD-182	Ø 182 - 176 mm
		SD-192	Ø 192 - 186 mm
		SD-201	Ø 201 - 195 mm

** incl. SD-132 and SD-153

Included with delivery:

Air spring squeezer, hydraulic hose, pressure relief valve, quick venting function, 2x protective grids, 1x sealing disc base

List of compatible air spring systems available on request.

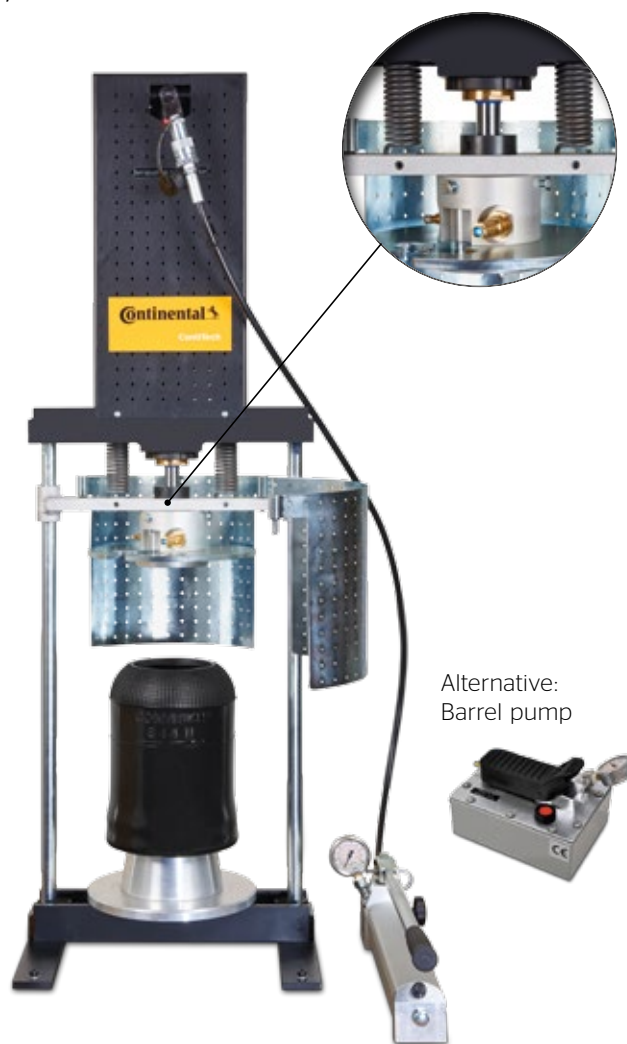

Go to application video
www.contitech.de/aspress-en

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2017 ContiTech AG. All rights reserved. For complete information go to: www.contitech.de/disl_en



ContiTech Luftfedersysteme GmbH
D-30165 Hannover · Phone +49 511 938-5268
airsprings_replacement@as.contitech.de
www.contitech.de
www.airspringreplacement.com

ContiTech